




Conductivity Electrodes

These conductivity electrodes are suitable for use with the EP307 Conductivity Pod. Use with an **e-corder** system to continuously monitor and record changes in solution conductance.

ET915 Dip-In Conductivity Electrode

A general purpose dip-in style conductivity electrode.

Cell constant (approx):	1
Depth of immersion:	5 mm
Probe material:	ABS
Total length:	14.6 mm
Body (OD):	3.2 mm
Cable length:	1 m (3.3')
Connector:	BNC

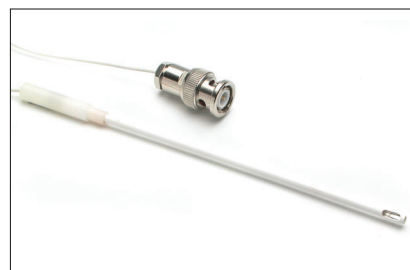


ET915 Dip-In Conductivity Electrode

ET916 Flow-Thru Conductivity Electrode (17 μ L)

A flow through conductivity electrode with an internal volume of 17 μ L. It is designed to connect to $1/16$ " (ID) tubing and is ideal for monitoring the conductivity of a continuous flow.

Cell constant (approx):	1
Internal volume:	17 μ L
Probe material:	ABS
Tubing size:	1.6 mm ($1/16$ ")
Total length:	4.2 cm
Cable length:	1 m (3.3')
Connector:	BNC

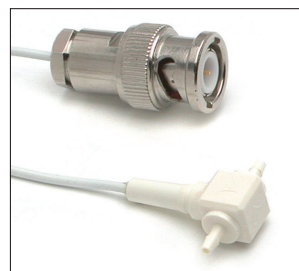

ET916 Flow-Thru Conductivity Electrode

ET908 Flow-Thru Conductivity Electrode (93 μ L)

A flow through conductivity electrode with an internal volume of 93 μ L. It is designed to connect to $1/8$ " (ID) tubing and is ideal for monitoring the conductivity of a continuous flow.

Cell constant (approx):	1
Internal volume:	93 μ L
Probe material:	ABS
Tubing size:	3.2 mm ($1/8$ ")
Total length:	4.3 cm
Cable length:	1 m (3.3')
Connector:	BNC



ET908 Flow-Thru Conductivity Electrode